




Collegamento per carichi monofase tra L e N  
Wiring for single-phase loads between L and N

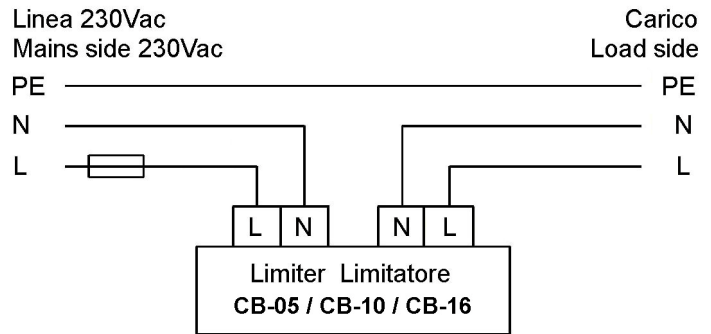


The limiters are made for network 230Vac maximum load 16A, shall be located between the line and the load (see figure). In the moment of switching-on the system the inrush current absorbed by the load will be limited for approximately 2 seconds. Box with shuko socket and power switch, cable with shuko plug 1.5Mt.

I limitatori sono realizzati per la rete 230Vac carico max 16A, devono essere posizionati tra la linea ed il carico (vedi figura). Al momento dell'accensione, la corrente di spunto assorbita dal carico sarà limitata per circa 2 secondi. Ciabatta con presa shuko ed interruttore, cavo con spina shuko 1.5Mt.

Type	CB-05	CB-10	CB-16
<b>Operating data - Dati operativi</b>			
Rated Voltage - Tensione	220-240 Vac	220-240 Vac	220-240 Vac
Rated frequency - Frequenza	50-60 Hz	50-60 Hz	50-60 Hz
Max load current - Corrente max di carico	5 A	10A	16 A
Internal impedance - Resistenza interna	40 Ω	10 Ω	4 Ω
<b>Environment - Ambiente</b>			
Ambient temp. - Temp.ambiente	40°C	40°C	40°C
<b>Measures and weights-Misure e pesi</b>			
Dimensions - Dimensioni	198X82Xh55 mm	198X82Xh55 mm	198X82Xh55 mm
Weight - Peso	0,70 Kg	0,75Kg	0,75 Kg
<b>Mounting and IP - Montaggio ed IP</b>			
Mounting- Montaggio	Shuko Box	Shuko Box	Shuko Box
Screw terminals - Morsetti a vite	2.5mm <sup>2</sup>	2.5mm <sup>2</sup>	2.5mm <sup>2</sup>
Protection index - indice di protezione	IP00	IP00	IP00
<b>Order numbers -Codici</b>			
Code - Codice	50423205	50423210	50423216

Dimensioni in mm - Dimensions in mm Made in Italy

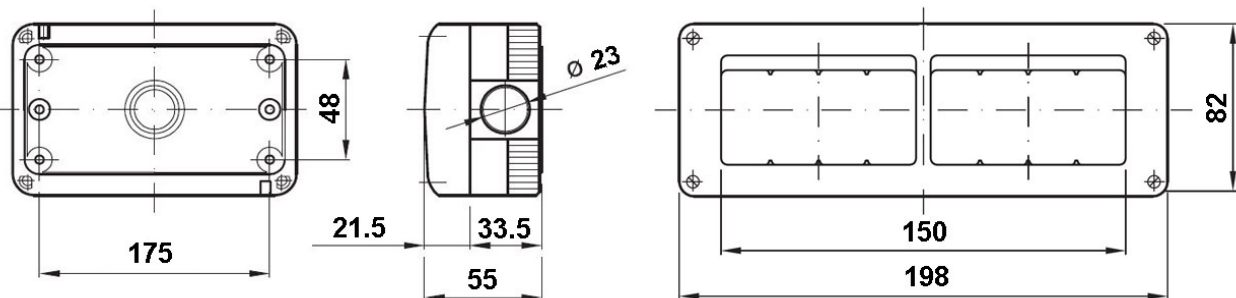

Nota — Note:  
proteggere con adeguato fusibile il carico—protect the load with a suitable fuse

Iso 9001 Certified

