


# ETD 34

## Ferrite Transformers

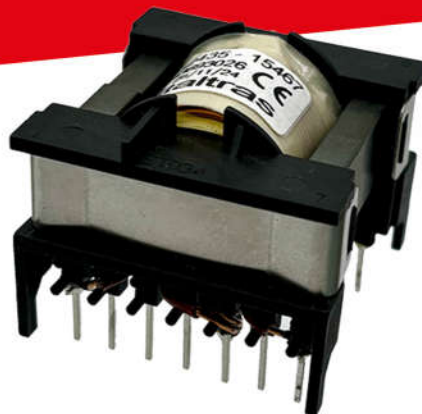

### Dati tecnici / Technical data

Conformità norme EN 61558 / EN 61558 approved  
 Marchio CE; classe B / CE mark; class B  
 Ferriti marcate / Marked ferrites  
 Tensione di isolamento 3750 VAC / Insulation voltage 3750 VAC  
 Frequenza nominale fino a 500kHz / Nominal frequency up to 500kHz  
 Temperatura ambiente 40 °C / Ambient temperature 40 °C  
 Conforme alla direttiva RoHS / RoHS conform  
 Grado di protezione IP00 / Degree of protection IP00  
 Rocchetto singola camera / Single chamber coilformer  
 Avvolgimenti in rame smaltato classe H / Class H enamelled copper wire coils  
 Immersione in vernice / Dipping in varnish  
 Test elettrici sul 100% della produzione / 100% tested production



### Trasformatori in ferrite ETD34 – ETD34 ferrite transformers


Code	Model	Frequency Hz	Number of windings	External shield	Mounting	UL materials	Potting	N. Pins	Weight Gr
On request	ETD34	Up to 500kHz	On request	On request	Horizontal	Yes	On request	14	80

Su richiesta anche rocchetti a doppia camera / Double chamber coil former also available on request  
 Diametro di foratura PCB consigliato almeno 1.5mm / Recommended PCB drilling diameter at least 1.5mm


Gli ingombri del trasformatore finito corrispondono alle dimensioni massime del rocchetto / The dimensions of the transformer correspond to the maximum dimensions of the coil former

### Dimensioni fisiche in mm / Physical dimensions in mm


#### Coil former

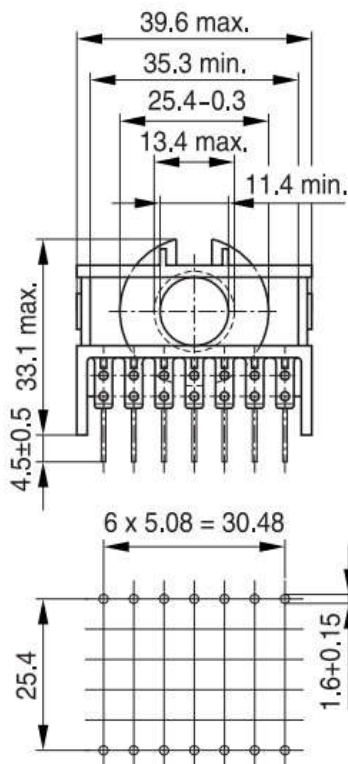

Hole arrangement  
View in mounting direction

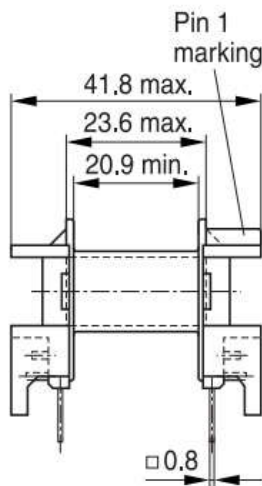

#### Yoke

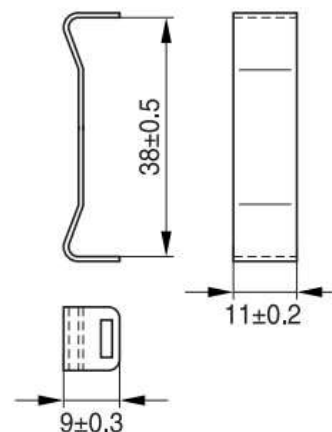

Dimensions 39.6 x 41.8 x h 33.1

ETD34



Via Costamagna 8/A – 12037 SALUZZO (Cn) – ITALY  
 Phone +39 0175 249400 / +39 0175 217215 – Fax +39 0175 249814

www.italtras.com italtras@italtras.com

Italtras®