

Ferrite Transformers

Dati tecnici / Technical data

Conformità norme EN 61558/ *EN 61558 approved*

Marchio CE; classe B / *CE mark; class B*

Ferriti marcate / *Marked ferrites*

Tensione di isolamento 3750 VAC / *Insulation voltage 3750 VAC*

Frequenza nominale fino a 500KHz / *Nominal frequency up to 500KHz*

Temperatura ambiente 40 °C / Ambient temperature 40 °C

Conforme alla direttiva RoHS / *RoHS conform*

Grado di protezione IP00 / Degree of protection IP00

Rocchetto singola camera / *Single chamber coilformer*

Avvolgimenti in rame smaltato classe H / *Class H enamelled copper wire coils*

Immersione in vernice / *Dipping in varnish*



Trasformatori in ferrite 2xE65 – 2xE65 ferrite transformers

[illegible]

Su richiesta anche rocchetti a doppia camera / *Double chamber coil former also available on request*







Gli ingombri del trasformatore finito corrispondono alle dimensioni massime del rocchetto /

The dimensions of the transformer correspond to the maximum dimensions of the coil former

Dimensioni fisiche in mm / Physical dimensions in mm

Horizontal

Dimensions 65.0 x 80.5 x h 65.6

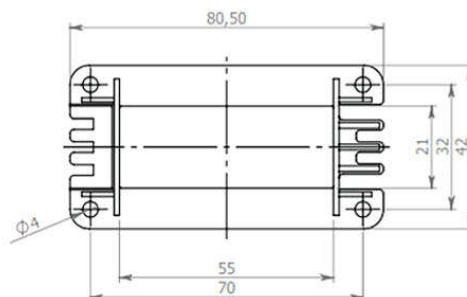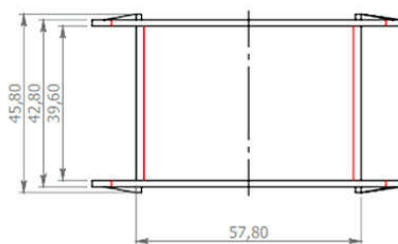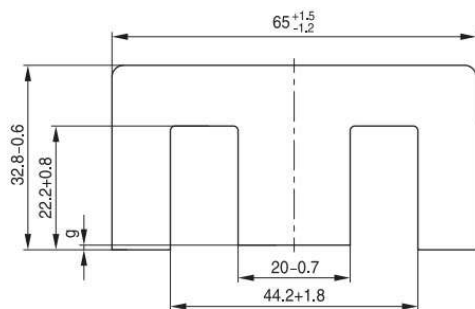

2xE65



Via Costamagna 8/A – 12037 SALUZZO (Cn) – ITALY
Phone +39 0175 249400 / +39 0175 217215 – Fax +39 0175 249814

www.italtras.com italtras@italtras.com

Italtras®